

Specifications

For other materials or modifications, please consult TESCOM.

OPERATING PARAMETERS

Pressure rating per criteria of ANSI/ASME B31.3

Maximum Inlet Pressure

3600 psig / 248 bar

Outlet Pressure Ranges

50-89 psig / 3.4-6.1 bar

90-200 psig / 6.2-13.8 bar

201-320 psig / 13.9-22.1 bar

Leakage

Bubble-tight

Filtration

40 micron nominal

Operating Temperature

-40°F to 200°F / -40°C to 93°C

Flow Capacity (approximate)

$C_v = 0.5$

MEDIA CONTACT MATERIALS

Body

Aluminum 6061-T6 with Nickel Plating

Seat

Polyimide (Vespel®)

Main Valve

17-4 PH Stainless Steel

Sensor

Aluminum 6061-T6

Sensor Insert

17-4 PH Stainless Steel

Remaining Parts

300 Series Stainless Steel, PTFE, Nitrile, Buna-N, Ethylene Propylene

OTHER

Cleaning

CGA 4.1 and ASTM G93

Connections

1/4" Inlet, 3/8" Outlet, NPTF, and SAE

Weight

1.4 lbs / 0.6 kg

Vespel® and Teflon® are registered trademarks of E.I du Pont de Nemours and Company.



TESCOM 20-1000 Series regulator is designed with lightweight aluminum construction for onboard compressed natural gas vehicles with 7 liter engines and larger. Piston sensed for long service life with a heat exchanger to prevent freezing.


Application

- Compressed natural gas vehicles

Features and Benefits

- Piston-sensed design provides a long service life and enhanced safety
- High flow, low pressure drop
- Balanced valve design minimizes supply pressure effect
- Lightweight, precision machined aluminum construction
- Used in diverse applications for a broad range of temperatures, flows, and pressures
- Wide variety of preset outlet pressures are available
- Heat exchanger eliminates freeze-up
- NGV 3.1 approved



20-1000 Series Regulator Drawing

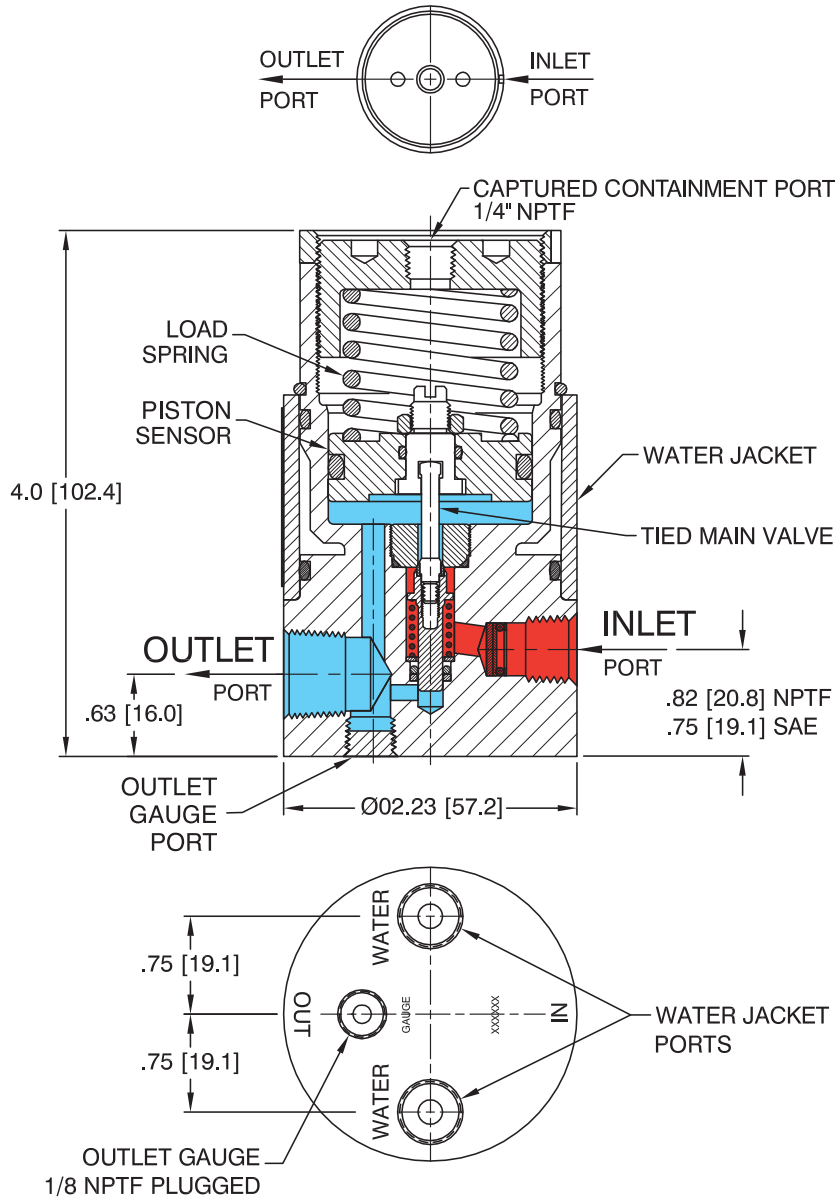

All dimensions are reference & nominal
Metric [millimeter] equivalents are in brackets

20-1000 Series Regulator Flow Charts

For more information on how to read flow curves, please refer to the Flow Curves and Calculations document (debul2007x012) in the TESCOM catalog or on www.tescom.com.

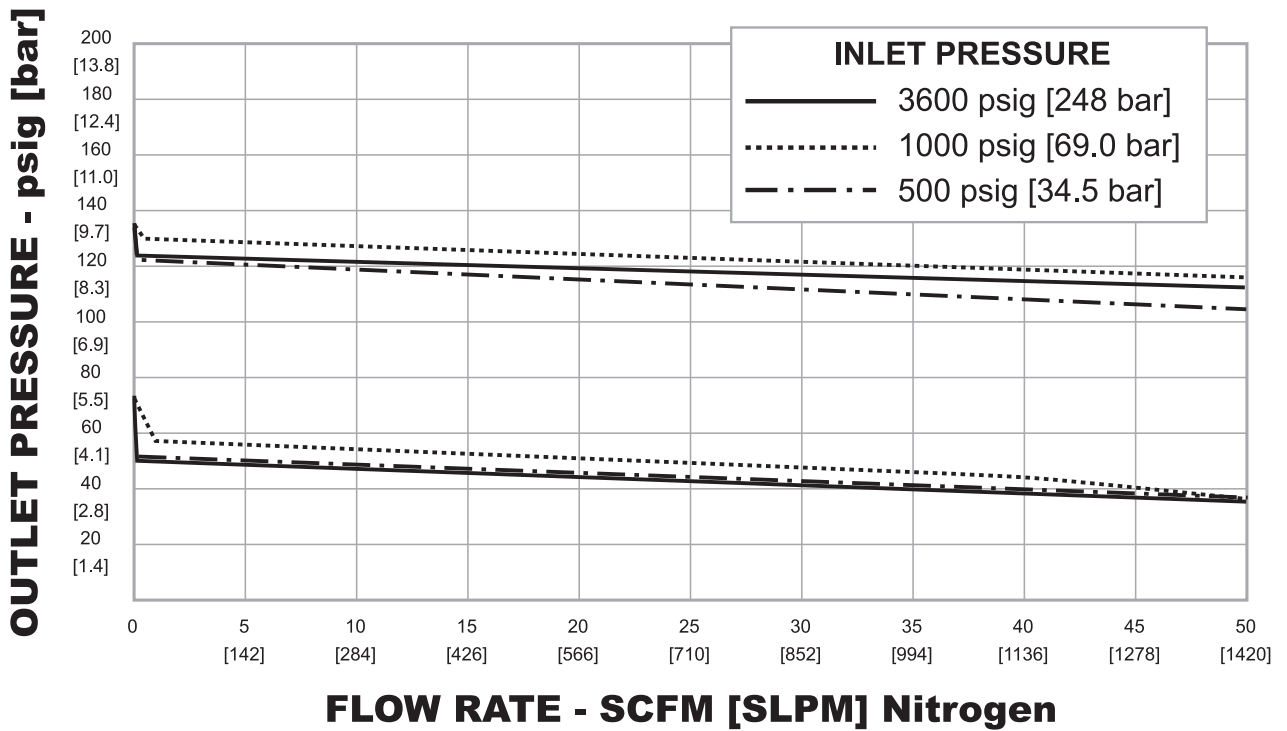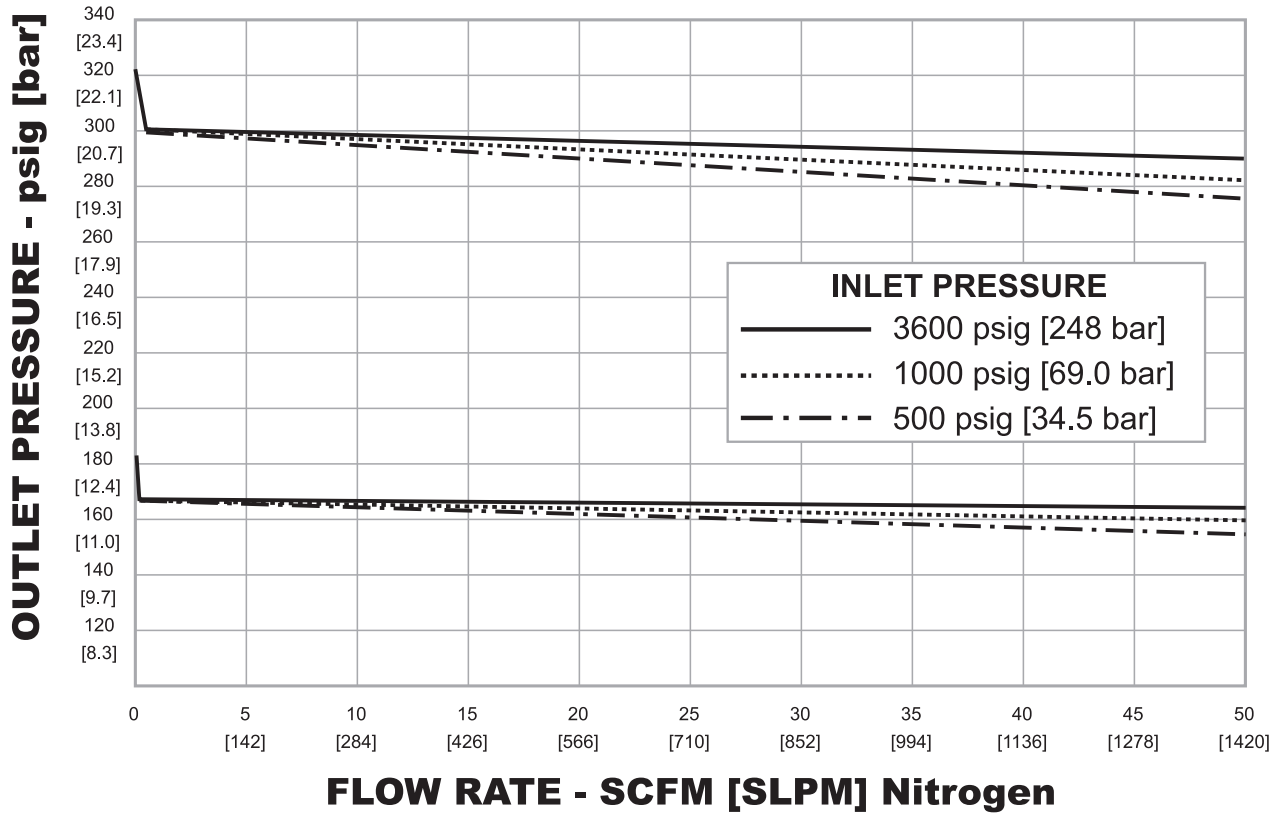

20-1000 Series Regulator Part Number Selector

Repair Kits, Accessories & Modifications may be available for this product. Please contact TESCOM for more information.

Example for selecting a part number:

20-10	3	1	- 2	9	01			
BASIC SERIES	BODY MATERIAL	MAXIMUM OUTLET PRESSURES	SET PRESSURE RANGES	PORT TYPE	INLET AND OUTLET SIZE	SET PRESSURE		
20-10	3 – 6061-T6 Aluminum	1 – 125 psig 8.6 bar	50-89 psig 3.4-6.1 bar	1 – SAE 2 – NPTF	9 – 1/4" Inlet 3/8" Outlet	01 – 50 psig	10 – 275 psig	19 – 65 psig
						3.4 bar	19.0 bar	4.5 bar
						02 – 75 psig	11 – 300 psig	20 – 70 psig
		5.2 bar	20.7 bar	4.8 bar				
		03 – 100 psig	12 – 90 psig	21 – 89 psig				
		6.9 bar	6.2 bar	6.1 bar				
		04 – 125 psig	13 – 185 psig	22 – 140 psig				
		8.6 bar	12.8 bar	9.7 bar				
		05 – 150 psig	14 – 110 psig	26 – 80 psig				
10.3 bar	7.6 bar	5.5 bar						
06 – 175 psig	15 – 120 psig	27 – 105 psig						
12.1 bar	8.3 bar	7.2 bar						
07 – 200 psig	16 – 170 psig	28 – 60 psig						
13.8 bar	11.7 bar	4.1 bar						
08 – 225 psig	17 – 320 psig	29 – 115 psig						
15.5 bar	22.1 bar	7.9 bar						
09 – 250 psig	18 – 135 psig	30 – 95 psig						
17.2 bar	9.3 bar	6.6 bar						