


Key Features of the Air Header

- Can be configured quickly in any layout to suit application, utilising standard components
- Suitable for low pressure applications to 150 PSI
- Ball valve isolations
- Widely specified in the oil, gas and petrochemical industries for compact installations

Standard Specification

- Maximum working pressure 150 PSI
- Valve types – Ball Valves
- Maximum working temperature 200°C
- Tube – ¾" Schedule 40

General Arrangement Drawing

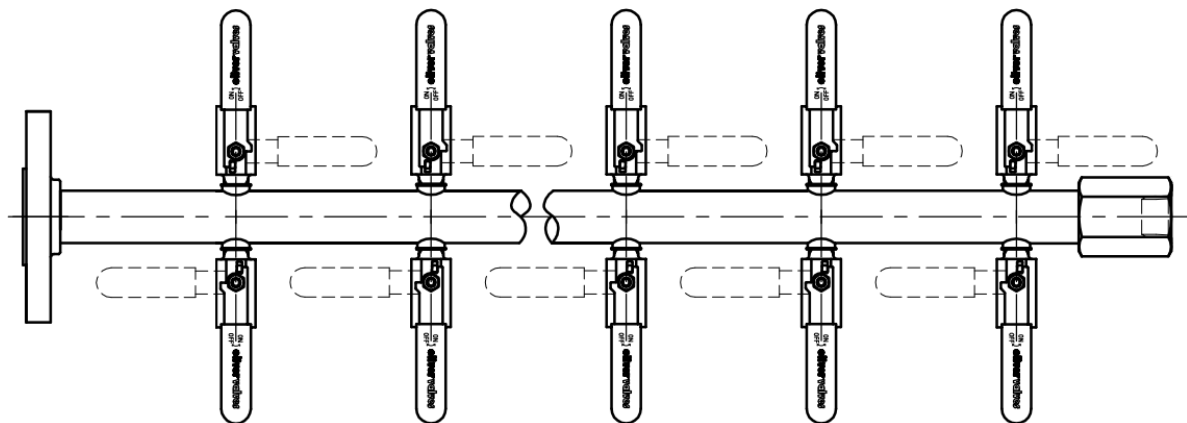

Ordering Code

(Typical example)

AH

8

S/

TWO/

50F(I)

BAH25/50S(O)

(V)

/BKTS

Air Header

Total number of Outlet Ports

Material Selection

S 316S31 Stainless Steel (316)

ONE Single Sided
TWO Double Sided

i.e. AH10S/TWO – 5 outlets down each side
AH5S/ONE – 5 outlets down one side only

Ports

50F 1/2" (F) Connection SS
25F 1/4" (F) Connection SS

Standard 3/4" ports, inlet and vent.

Ball Valves

BAH25S 1/4" NPT Female
BAH25/50S 1/4 - 1/2" NPT Female
(ball valves are stainless steel)

Letters In Brackets

(I) Inlet Port
(O) Outlet Ports
(V) Vent Port

Mounting

BKTS Stainless Steel Bracket